

CP550

Range of checkweighers

CP550 checkweigher is a perfect checkweigher for dynamic weighing of boxes and large volumes.

Its robust and functional design provides a reliable solution in the weight control of heavy loads production.


Varpe dynamic checkweighers increase **benefits of your production**




Technical features

Production units / minute	Up to 40	Reject signaltime control	Yes
Accuracy	From ± 10 g	Motor	Asynchronous &/or Servo Motor
Unit of division	1 g	Environment temperature	0-40 °C
Storable memory formats	Up to 56	Frame construction	Paint. carbon colour RAL 9006
Display	LCD-LED tactil colour 7"	Working height (mm)	425 min. 1200 max.
Protection	IP54	Conv. dimensions	Adapted to product needs
Maximum weight	Up to 50 kg	Autotare	Yes
Emergency stop	Yes		

Dimensions

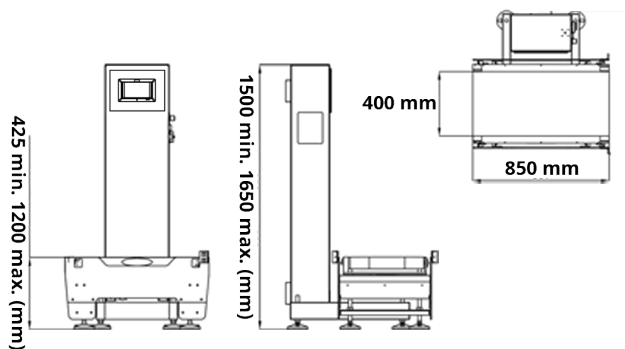

Reject systems

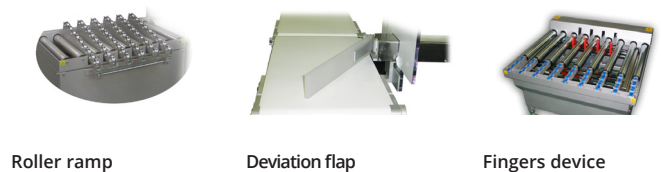

Options

- Several rejection devices (pusher, roller ramp, deviation flap, fingers device)
- Reject confirmation
- Different conveyors width and height
- Light and-or sound alarm
- USB port connection
- Data printer
- Central data connection DATAHUB WEB, MOD BUS TCP IP, DATAHUB LT
- Ethernet connections, RS-232 and RS-485
- Barcode reader
- Automatic print listing
- Autozero - Autotrack
- Auditing
- Automatic speed controller
- Dynamic adjustment in production
- Production stoppages management
- Production control
- Remote communication for distance maintenance
- PID system (FEEDBACK)
- Compliance with MID directive

Version 2

* Varpe offers possibility of adapting standard specifications to customer requirements

VARPE CONTROL DE PESO S.A. Pasaje Arrahona 14-16 · Pol. Ind. Santiga · 08210 Barberà del Vallès
Barcelona · España +34 937 479 570 www.varpe.com sales@varpe.es



VARPE
QUALITY UNDER CONTROL